

## **Charge**Plus **FLEX**

FSIP's

exclusive

**Charge**Plus

**FLEX** is a portable, universal, high-

frequency, off-board, lead-acid battery charger that helps maximize run time in small to midsize electric vehicles. It features programmable voltage, current, and selectable charging profile via easy-to-read LCD display. This unit has a lightweight portable design that can be taken almost anywhere for use on your

shop floor or for off-site maintenance



### Features/Benefits

charging.

- Programmable voltage, current, and charging curves
- For lead-acid (flooded, AGM, or gel) batteries
- Convenient 12 lbs. portable design with carry handle and rubber feet (or may be wall-mounted)
- >90% high energy efficiency
- · Charge cycle begins as low as 2 volts
- Automatic float mode
- 5-foot DC cable with standard SB50 DC connector included
- · Wide assortment of pigtails available
- · Remanufacturable


















# Charge Plus FLEX

**Easy to read, easy to interpret digital display.** LED indicators with status screen for quick charge cycle monitor and status. The LCD display shows the battery voltage before starting the charge, then displays the current value (A), the voltage (V), recharged capacity (C) and time elapsed from the start (t).

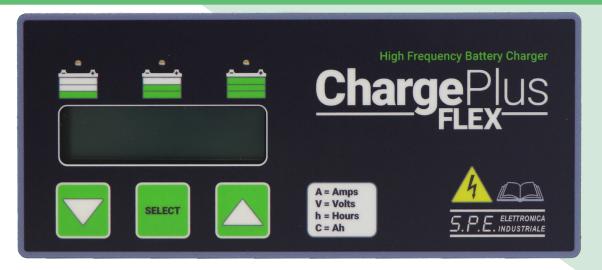

#### 11 Programmable Charging Profiles

| INDEX | CURVE         |  |  |
|-------|---------------|--|--|
| 1     | MK AGM        |  |  |
| 2     | ACD Wet       |  |  |
| 3     | Zenith AGM    |  |  |
| 4     | ACD Wet Float |  |  |
| 5     | Fullriver AGM |  |  |
| 6     | Haze GEL      |  |  |
| 7     | PzV GEL       |  |  |
| 8     | Optima 12V    |  |  |
| 9     | Sonnenshein   |  |  |
| 10    | Optima AGM    |  |  |
| 11    | Discover AGM  |  |  |

### **Charging Ranges**

| VOLTAGE (V) | AMPERAGE (A) |
|-------------|--------------|
| 12 V        | 15-30 A      |
| 24 V        | 15-30 A      |
| 36 V        | 15-25 A      |
| 48 V        | 15-20 A      |

This charger offers end user selectable charging voltage levels. Ensure the correct battery profile is set before use. If in doubt, the user should ask a qualified professional for clarification.

| Model   | DC Output<br>Voltage | DC Output<br>Current | Input Voltage        | DC Connector |  |
|---|----------------------|----------------------|----------------------|--------------|--|
| <b>Charge</b> Plus <b>FLEX Dim</b> .: 13.7" × 8.7" × 26.2" <b>Wt.</b> : 11 lbs. |                      |                      |                      |              |  |
| 24-CBHF2M-3625FLEX  | 12-48 V              | 25 A                 | 110-120 VAC 50-60 Hz | SB50         |  |